

→ Series 420



■ MATERIAL



■ SPECIFICATION



1/4" – 3/8"

– 40°C to + 260°C
depending on version0,5 – 50 bar
depending on version

■ SUITABLE FOR

Liquids	neutral and non-neutral	
Air, gases and vapours	neutral and non-neutral	
Steam		

■ EXAMPLES OF USE

For the protection of:

- pressure tanks and -systems for neutral / non-neutral vapours, gases and liquids

- steam boilers and steam plants

Please observe plant-specific regulations and use of appropriate valve version and sealing material.

- chemical plants, biogas plants
- process technology
- desalination plants
- process equipment construction and medical technology
- shipbuilding industry and marine equipment
- secondary areas in the food-, beverage-, pharmaceutical- and cosmetics-industries
- offshore-applications
- general applications with screwed pipe connections

Safety valves are set and sealed at the factory.

■ APPROVALS

TÜV-Type test approval 2069	D/G, F, F/K/S ¹
EC type examination	S/G, L, F/K/S ¹
KGS	G
TR ZU 032/2013 - TR ZU 010/2011	D/G (S/G), F (L), F/K/S ¹
Requirements	
AD 2000 Data sheet A2	DIN EN ISO 4126-1
TRD 421	PED 2014/68/EU
TRB 801 No. 22 and No. 23 ¹	KGS AA 319

Classification society

Germanischer Lloyd	GL
Lloyd's Register EMEA	LR EMEA
American Bureau of Shipping	ABS
Det Norske Veritas	DNV
Bureau Veritas	BV
Russian Maritime Register of Shipping	RS

■ MATERIALS

Component	Material	DIN EN	ASME
Inlet body	Stainless steel	1.4404	316 L
Outlet body	Stainless steel	1.4404	316 L
Internal parts	Stainless steel	1.4404	316 L
Spring	Stainless steel	1.4310	302
Metallic bellows (optional)	Stainless steel	1.4571	316 Ti
PTFE-bellows (optional)	PTFE	PTFE	PTFE

¹only for versions with bellows

t	gastight version of spring housing	for neutral and non-neutral media without counter pressure. The environment is protected from being affected by the medium.
tb	gastight version with bellows	for neutral and non-neutral media. spring and moving parts as the environment are protected from being affected by the medium. Version of bellows depend on set pressure: DN8: 0,5 to 9 bar PTFE bellows; 9,1 to 50 bar stainless steel bellows DN10: 0,5 to 7 bar PTFE bellows; 7,1 to 50 bar stainless steel bellows

■ MEDIUM

GF	gaseous and liquid	Air, vapours, gases, liquids and - depending on seal - also for steam Only for steam boilers <10l and d ₀ minimum 6mm, i.e. only DN10 usable.
-----------	--------------------	---

■ TYPE OF LIFTING MECHANISM

L	Lifting lever
0	without lifting device

■ AVAILABLE NOMINAL DIAMETERS AND CONNECTION SIZES

Nominal diameter DN		8			10		
Inlet		1/4" (8)	SV (8mm)	SV (10mm)	3/8" (10)	SV (10mm)	SV (12mm)
Outlet	3/8" (10)	■	■	■	■	■	■
	SV (12mm)	■	■	■	■	■	■

■ TYPE OF CONNECTION INLET / OUTLET THREADED CONNECTIONS

m / f	Standard	Male thread BSP-P / Female thread BSP-P	DIN EN ISO 228-1 / DIN EN ISO 228-1
Against surcharge			
SV / f		Cutting ring threaded connection / female thread BSP-P	EN ISO 8434-1 / DIN EN ISO 228-1
SV / SV		Cutting ring threaded connection / Cutting ring threaded connection	EN ISO 8434-1 / EN ISO 8434-1

■ SEALS


EPDM	Ethylene propylene diene	Elastomere moulded seal with metallic support	-40°C to +170°C
FKM	Fluorcarbon	Elastomere moulded seal with metallic support	-20°C to +200°C
Against surcharge			
FFKM	Perfluorinated rubber	Elastomere moulded seal with metallic support	-10°C to +260°C

NOMINAL DIAMETERS, CONNECTIONS, INSTALLATION DIMENSIONS

Series 420: Connection, installation dimensions, ranges of adjustment			
Nominal diameter	DN	8	10
Connection DIN EN ISO 228	G	1/4" (8)	3/8" (10)
Outlet DIN EN ISO 228	G1	3/8" (10)	3/8" (10)
Installation dimensions in mm	L	25	25
	Lmax	45	45
	H	75	75
	H1	87	87
	Hmax	93	93
	h	32	32
	h1	12	12
	SW	20	20
	do	4,5	6
	kg	0,31 / 0,36*	0,23 / 0,28*
Range of adjustment	bar	0,5-50	0,5-50

* Weight indications for valve with lever

MAIN DIMENSIONS, INSTALLATION DIMENSIONS

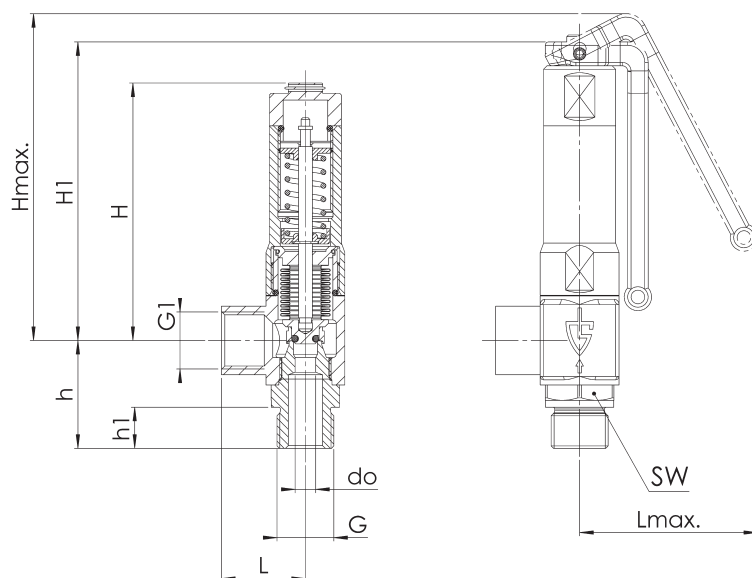

INDIVIDUAL SELECTION / VALVE CONFIGURATION

Series	Valve version	Medium	Lifting device	Nominal diameter DN	Connection type		Connection size		Seal	Options	Set pressure	Quantity
					Inlet	Outlet	Inlet	Outlet				
420	tb	GF	L	8	m	f	8	10	FFKM		5,5	2
420	t	GF	O	10	SV	f	10mm	10	EPDM		22	1
420		GF										
420		GF										

In this table you can configure a valve according to your individual requirements (similar to the *example* shown, which should be deleted before you enter your own data). Please complete the table by hand using the abbreviations in this datasheet and then fax it to: +49(0)7141.4889488

Please do not forget to add your personal data so that our sales team can contact you.

Name _____

First Name _____

Company _____

Telephone _____

E-Mail _____

■ CAPACITY TABLE

Series 420: Blowing-off rates at 10% above set pressure							
Nominal diameter DN		8			10		
Set pressure bar		I	II	III	I	II	III
Air I Nm³/h	0,5	11	-	0,35	16	13	0,65
	1	15	-	0,48	24	19	0,88
	1,5	20	-	0,58	32	25	1,07
	2	24	-	0,67	40	32	1,24
Steam II kg/h	2,5	28	-	0,75	47	37	1,38
	3	33	-	0,82	55	43	1,52
	3,5	37	-	0,89	62	48	1,64
	4	41	-	0,95	69	53	1,75
Water III m³/h	4,5	45	-	1,01	76	58	1,86
	5	49	-	1,06	83	64	1,96
	5,5	53	-	1,12	90	69	2,05
	6	58	-	1,16	96	74	2,14
	6,5	62	-	1,21	103	79	2,23
	7	66	-	1,26	110	85	2,32
	7,5	70	-	1,30	117	90	2,40
	8	74	-	1,35	124	95	2,48
	8,5	78	-	1,39	131	100	2,55
	9	83	-	1,43	138	105	2,63
	9,5	87	-	1,47	145	111	2,70
	10	91	-	1,50	152	116	2,77
	11	99	-	1,58	166	126	2,90
	12	108	-	1,65	180	136	3,03
	13	116	-	1,71	194	147	3,16
	14	124	-	1,78	208	157	3,28
	15	133	-	1,84	222	167	3,39
	16	141	-	1,90	236	178	3,50
	17	149	-	1,96	250	188	3,61
	18	158	-	2,02	264	198	3,71
	19	166	-	2,07	278	208	3,82
	20	174	-	2,13	292	218	3,92
	21	183	-	2,18	306	229	4,01
	22	191	-	2,23	320	239	4,11
	23	199	-	2,28	334	249	4,20
	24	208	-	2,33	348	260	4,29
	25	216	-	2,38	362	270	4,38
	26	224	-	2,43	376	280	4,46
	27	233	-	2,47	390	291	4,55
	28	241	-	2,52	404	301	4,63
	29	249	-	2,56	418	312	4,72
	30	258	-	2,60	432	321	4,80
	32	274	-	2,69	460	342	4,95
	34	291	-	2,77	488	363	5,11
	36	308	-	2,85	515	384	5,25
	38	324	-	2,93	543	404	5,40
	40	341	-	3,01	571	425	5,54
	42	358	-	3,08	599	446	5,67
	44	374	-	3,15	627	467	5,81
	46	391	-	3,23	655	488	5,94
	48	408	-	3,30	683	509	6,07
	50	424	-	3,36	711	530	6,19